

TRANSMISSION CORPORATION OF ANDHRA PRADESH LTD.


GUARANTEED TECHNICAL PARTICULARS FOR 245KV 1200A HDB ISOLATOR WITH SINGLE EARTH SWITCH

S.No	DESCRIPTION	GUARANTEED VALUE
1	Type / Installation	: "DBR" Double Break Center post rotating type" / Outdoor installation
2	Manufacturer's Name and Country of Manufacture	: PAVANI POWR SYSYEM PVT LTD. INDIA
3	Standards according to which the isolators are manufactured	: IS: 9921 - Part-I to V / IEC:62271-102
4	Miximum design voltage at which the isolator can operate (kV)	: 245
5	Frequency (Hz)	: 50
6	Rated voltage (kV)	: 220
7	Maximum current that can be safely interrupted by the isolator Inductive (A & % PF) Capacitive (A & % PF)	: Inductive- 0.7 Amps at 0.15 p.f. Capacitive- 0.7 Amps at 0.15 p.f.
8	Continuous current rating Nominal (Amps) under site conditions	: 1200
9	Rated short time current	: MAIN SWITCH / EARTH SWITCH.
	i) For 3 seconds (kA rms)	: 40 / 50KA 3.Sec.
	ii) For 1 second (kA rms)	: Not applicable
	iii) Rated peak short time current (kVp)	: 100 / 125
10	Current density at the minimum cross-section of	: Contact sizes indicated in Annexure - III of specification & as per the property of materials.
	a) Moving blade (Amps/ Sq.mm) Cu. Tube	: 2.0 Amps / Sq.mm for HDE Cu. Tube
	b) Terminal pad : Aluminum Flat	: 1.0 Amp/ Sq.mm for EC grade Alu. Flat
	c) Contacts : Cu.Flat	: 1.6 Amps/Sq.mm for HDE Cu. Flat
	d) Terminal connector : Aluminm Casting	: 1.0 Amps/Sq.mm for Alu. Alloy.
11	Maximum Temp. Rise of current carrying parts when carrying rated current continuously (deg.C)	: Within the specified limits of IS: 9921 - PartII/ IEC-62271-102
12	Insulation Levels	:
	i) Impulse withstand voltage (kV peak) phase to earth across isolating distance:	: 1050/ 1200 kV peak
	ii) Switching surge withstand voltage (kV peak) phase to earth across isolating distance	: Not applicable
	iii) Power frequency withstand voltage (kV rms) Phase to earth isolating distance	: 460/ 530 kV rms
13	Minimum clearance in air Drawing approval subject to valid vendor registration	:
	i) Between poles (mm)	: Phase spacing of 4500 mm
	ii) Between live parts and earth (mm)	: 2100 mm (Equal to dry arcing distance of insulators selected)
	iii) Between live parts when switch is open	:
	a) On the same pole (mm)	: 3200
	b) Between adjacent poles (mm)	: 4500

CHIEF ENGINEER/PROJECTS

APTRANSCO/VISVIJAYAWADA

Since the supply of terminanal connectors is not in the scope of manufacturer as mentioned in the drawings. The EPC contractor shall be instructed to supply the same line with CT/PT/CVT/Isolator/IVT /LA /Breaker requirement and campability.



TRANSMISSION CORPORATION OF ANDHRA PRADESH LTD.

GUARANTEED TECHNICAL PARTICULARS FOR 245KV 1200A HDB ISOLATOR WITH SINGLE EARTH SWITCH


S.No	DESCRIPTION		GUARANTEED VALUE
15	Rated mechanical terminal load		:
	i)	Load along the terminal connector side (Kg.)	: 102
	ii)	Load across the terminal connector side (Kg.)	: 33.7
16	Torque required to operated the switch in Kg.m		: 40
			CHIEF ENGINEER/PROJECTS
			APTRANSCO/VS/VIJAYAWADA
17	Design and Construction		:
	i)	No. of insulators per pole	: Three
	ii)	No. of breaks per pole	: Two
	iii)	Type of closing / opening mechanism (Horizontal/Vertical break straight etc.)	: Horizontal double break
	iv)	Contacts	:
	a)	Material and grade	: Hard drawn electrolytic copper flat, contact area is silver plated (15 Microns)
	b)	Cross-sectional area (mm)	: 768 sq.mm for 1200 Amps
	v)	Moving blades	:
	a)	Material and grade	: Hard drawn electrolytic copper flat, contact area is silver plated (15 Microns)
	b)	Cross-sectional area (mm)	: 643 sq.mm for 1200 Amps
	vi)	Contact support	:
	a)	Material and size of channel/block	: 4 mm thick, MS HDG
	b)	Material and size of plate	: 6 mm thick, MS HDG Plate
	vii)	Rain hood - Material grade and size	: 1mm GI Sheet
	viii)	Turn and twist mechanism	:
	a)	Material and size of clamps	: 50 x 10 mm thick, MS HDG flat.
	b)	Maerial size of springs	: 3.0 mm Stainless steel wire
	c)	Whether springs are encased	: Not encased.
	ix)	Nuts and Bolts	:
	a)	Size, material and grade in live parts	: Less than M12: Stainless steel
	b)	Size, material and grade in other parts	: M12 and above: MS HDG.
	x)	Insulator base plate material and size of plate below insulators	: 270 x 270 mm X 12mm MS HDG plate
	xi)	Bearings	:
	a)	Material and size of housing	: MS HDG suitable for 40 ID tapper roller/ ball bearing.
	b)	No. of bearings, location and size	: 2 Nos . Below centre rotating post insulator.

Since the supply of terminanal connectors is not in the scope of manufacturer as mentioned in the drawings. The EPC contractor shall be instructed to supply the same line with CT/PT/CVT/Isolator/IVT /LA /Breaker requirement and campability.






TRANSMISSION CORPORATION OF ANDHRA PRADESH LTD.

GUARANTEED TECHNICAL PARTICULARS FOR 245KV 1200A HDB
ISOLATOR WITH SINGLE EARTH SWITCH

S.No	DESCRIPTION	GUARANTEED VALUE
xii)	Tandem pipe	:
	a) Size, class and No. of pipes	: 32mm NB Class B,GI Pipe for Main switch-2Nos for Earth switch-1No.
	b) Size of shackle, screw	: Suitable for 32mm NB GI Pipe
	c) No. of bearings/bush and its material and size	: Not applicable
xiii)	Type of interlock	: Electrical interlock between isolator and correspondin breaker / Mechanical interlock between M.S & E.S.
xiv)	Down pipe size and class	: 50 NB Class B GI pipe
xv)	Type of universal/swivel joint	:
	a) Between bearing and down pipe	: Universal joint
	b) Between down pipe and operating mechanism	: Vernier flange
xvi)	Operating mechanism	: Motor operated mechanism for main switch and manual operated mechanism with reduction gear for earth switch.
	a) Control cabinet material and thickness	: 3.mm THK Aluminum Sheet
	b) Degree of protection	: IP: 55 as per IS: 2147
	c) Type, size and No. of cable glands	: Double compression type 2Nos. 19 mm (Contractor scope of supply)
	d) Whether removable gland plate provided	: Yes, provided.
	e) Make, type, rating and quantity of motors	: HE/CGL/Remi or Eqvt. 3 Phase, 415 V, 0.5 HP
	f) Auxiliary blocks	: 12 NO + 12 NC Contacts for main switch, 6 NO + 6 NC Contacts for Earth switch, 10 Amps, 2 A DC Breaking with 2A - 1 No.
	g) Terminal blocks	: UBT-4
	i) Insulated wires	: 1100 V grades, 2.5 Sq.mm PVC For Auxilliary Circuit and 2.5 Sq.mm for Power cricuit.
	j) HRC Fuse / MCB	: C&S/Siemns/ABB or Eqvt.
	k) Space Heater	: 1 No. 230 V AC - 80 watts
	l) Interlocks	: with Rotary switch Kaycee or Eqvt.
xvii)	Base:	:
	a) Size of steel section used	: 145x80x5mm Rectangle box profile(M.S.HDG)
	b) Overall sie	: 145 x 80 x 3560 mm
	c) Total weight.	: 95Kgs (Approx.) one pole
18	List of drawings furnished.	: Enclosed.
Name of the firm		: For Pavani Power Systems Pvt. Ltd.
Signature of Bidder		: 
Designation & Seal		: (T. SESHAGIRI RAO) Managing Director
Date		: 18-05-2023
CHIEF ENGINEER/PROJECTS APTRANSCO/VS/VIJAYAWADA		

NOTE: 1. Drawings Approval subject to valid type test reports, to be checked during acceptance tests.

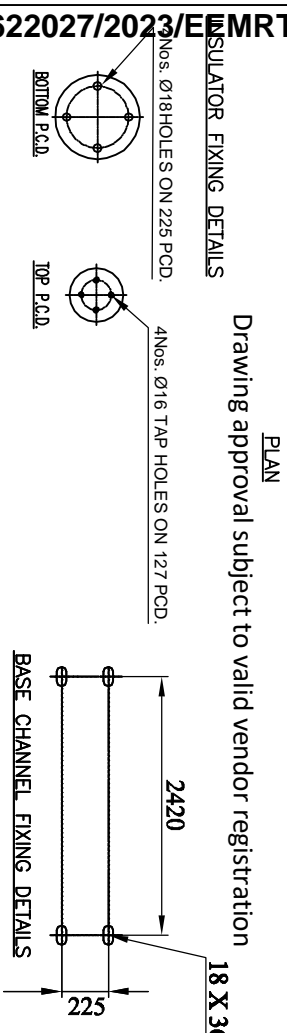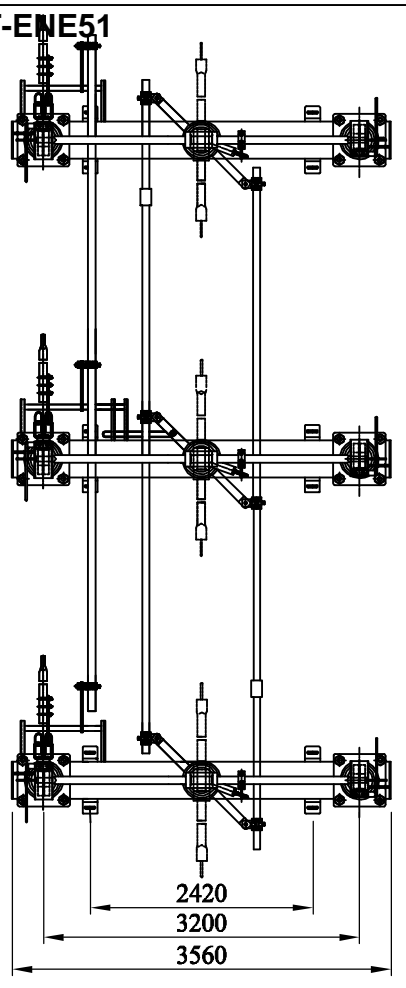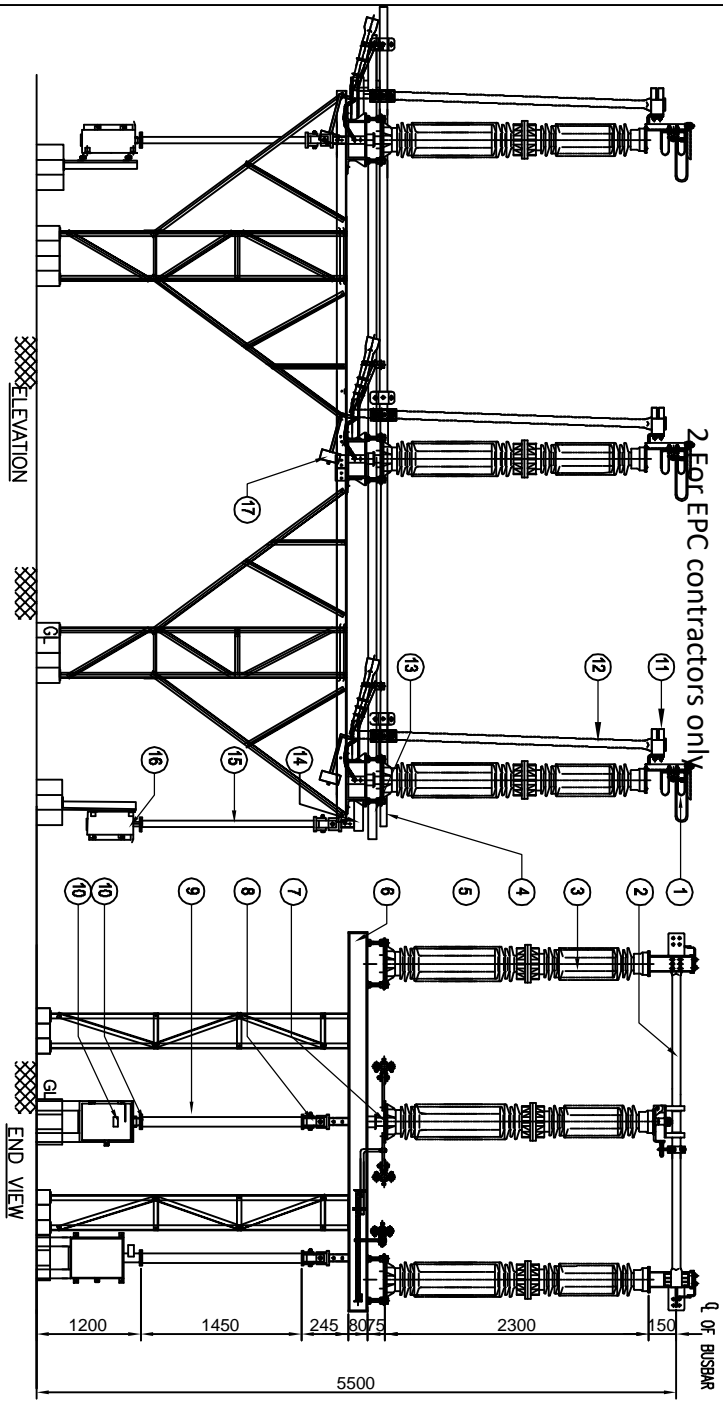

CHIEF ENGINEER/PROJECTS
APTRANSCO/VS/VIJAYAWADA

(T. SESHAGIRI RAO)
Managing Director

For Pavani Power Systems Pvt. Ltd.

TRANSMISSION CORPORATION OF
ANDHRA PRADESH LTD

PART LIST:

1. FIXED CONTACT ASSEMBLY
2. MOVING CONTACT ASSEMBLY
3. INSULATOR STACK (COSTUMER SCOPE)
4. TANDEM PIPE FOR ISOLATOR (32NB, CLASS "B" G.I PIPE)
5. ELEVATOR PLATE (270X270X12MM THK M.S HDG)
6. BASE CHANNEL (145 X 80 X 5MM THK. M.S HDG)
7. ROTATING STOOL BASE WITH LEVER ARM & CLAMP (M.S HDG)
8. OPERATING PIPE CONNECTING BUSH (M.S HDG)
9. DOWN PIPE FOR ISOLATOR (50NB CLASS"B" G.I PIPE)
10. MOTOR OPERATING MECHANISM FOR ISOLATOR
11. E.S FIXED CONTACT ASSEMBLY
12. E.S MOVING CONTACT ASSEMBLY
13. TANDEM PIPE FOR E.S (32NB CLASS "B" G.I PIPE)
14. TOP OPERATING MECHANISM FOR EARTH SWITCH (M.S HDG)
15. DOWN PIPE FOR E.S (50NB CLASS "B" G.I PIPE)
16. MANUAL OPERATING MECHANISM FOR E.S (RG BOX)
17. COUNTER WEIGHT FOR E.S (Per pole 10Kgs Approx.)

REFERENCE DRAWINGS:

1. FOR ISOLATOR CONTACT ASSEMBLY (1200 AMPS)
2. FOR EARTH SWITCH CONTACT ASSEMBLY
3. FOR MOTOR OPERATED MECHANISM FOR MAIN SWITCH
4. FOR MANUAL OPERATED MECHANISM FOR EARTH SWITCH
5. FOR MECHANICAL INTERLOCK BETWEEN ISOLATORS AND EARTH SWITCH.
6. FOR SCHEMATIC DIAGRAM
7. FOR TERMINAL BLOCK DETAILS
8. FOR NAME PLATE DETAILS

NOTE: 1. ALL DIMENSIONS ARE IN MILLIMETERS


2. THE INDICATED DIMENSIONS ARE SUBJECT TO THE MANUFACTURING TOLERANCE:

- UP TO 50mm ----- ±3%; 51 TO 100mm ----- ±2%
- 101 TO 300mm ----- ± 1%; ABOVE 300mm ----- ±0.5%
- 3. SHORT TIME CURRENT RATING 40KA/50KA mva. FOR 3 Sec.
- 4. MIN. CREEPAGE DISTANCE 3625 mm(25mm/KV)
- 5. APPLICABLE STANDARD : IEC: 62271-102
- 6. ALL FERROUS PARTS ARE HOT DIP GALVANIZED (85MICRONS)

REVISIONS		TITLE:	
D	C	B	A
PAVANI POWER SYSTEMS PVT.LTD.		AP TRANSCO	
Plot No. 06/065/4/6, K.K. OPENERS SOCIETY,		245KV, 1200A, TP, HDB, RT, ISOLATOR WITH SINGLE E.S.	
TDA, DULAPALLY, QUTHUBILLAPUR MANDAL,		(WITH MOTOR OPERATING MECHANISM)	
KORUPUZA POST, HYDERABAD - 500100.		DATE: 18-05-2023	
MEMORIAL MANAGER DIST. TELANGANA		DRAWN: _____	
		CHECKED: _____	
		APPROVED: _____	
		SHEET: 01 OF 09	
		DESIGN: PPSPT-APT-GAD-44-01	

7622027/2023/EMMRT-ENE51


NOTE: 1. Drawings Approval subject to valid type test reports, to be checked during acceptance tests.
2. For EPC contractors only.

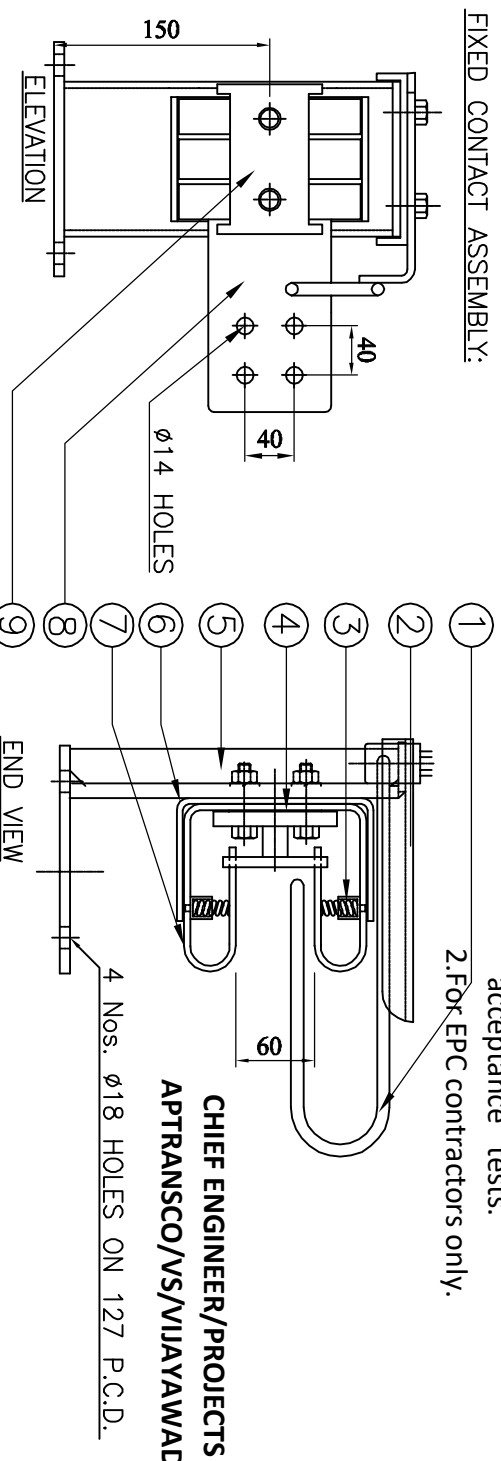


CHIEF ENGINEER/PROJECTS
APTRANSCO/VISUJAYAWADA

SL NO.	DESCRIPTION	SIZE IN MM	MATERIAL
1.	ARCING HORNS	Ø10MM ROD	M.S HDG
2.	RAIN HOOD	1MM SHEET	M.S HDG
3.	JAW SPRINGS	Ø2mm WIRE	STAINLESS STEEL
4.	BI-METALLIC SHEET	2mm THK	ALU. + CU.
5.	FIXED CONTACT SUPPORT CHANNEL	115x30x4 mm	M.S HDG
6.	JAW SUPPORT BRACKETS	32 X 5 FLAT	M.S HDG
7.	FIXED CONTACT JAWS (3. NOS)	32 X 4 FLAT	HDEC
8.	JUMPER PAD	100 X 12 FLAT	ALUMINIUM
9.	FC SPACER	-----	ALUMINIUM
10.	MOVING CONTACT	50-ODX41-ID	HDEC

- NOTE:
1. ALL DIMENSIONS ARE IN MILLIMETER
 2. ALL FERROUS PARTS ARE HOT DIP GALVANIZED (85 MICRONS)
 3. ALL NON FERROUS CONTACT POINTS ARE SILVER PLATED (15 MICRONS)
 4. MOVING CONTACT ASSEMBLY SHOWN IS FOR TURN & TWIST ASSEMBLY



For Pavani Power Systems Pvt. Ltd.
(T. SESHAGIRI RAO)
Managing Director

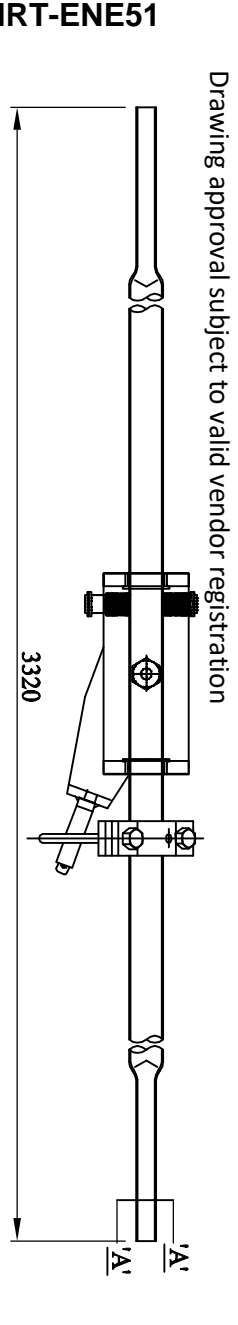

Drawing approval subject to valid vendor registration

7622027/2023/EEMRT-ENE51

Since the supply of terminal connectors is not in the scope of manufacturer as mentioned in the drawings. The EPC contractor shall be instructed to supply the same line with CT/PT/CVT/Isolator/IVT /LA /Breaker requirement and capability.

TRANSMISSION CORPORATION OF ANDHRA PRADESH LTD

AP TRANSCO

MAIN SWITCH CONTACT ASSEMBLY
(FOR 245kV, 1200A ISOLATOR)

PAVANI POWER SYSTEMS PVT.LTD.
Plot No. 05/056/4/6, K.K. OVERSEAS SOCIETY,
PDA, DULAPALLY, QUTHUBILLAPUR MANDAL,
KODURU ROAD, HYDERABAD - 500100.
KODURU MALKAJGIR DIST. TELANGANA

REVISIONS

D	C	B	A
---	---	---	---

SCALE: 1:1

DATE: 18-05-2023

DRAWN:

CHECKED:


APPROVED:

SHEET: 02 OF 09


DRG. NO.: PPSPT-APT-MSCA-A4-02

NOTE: 1. Drawings Approval subject to valid type test reports, to be checked during acceptance tests.

FIXED CONTACT ASSEMBLY of EPC contractors only.

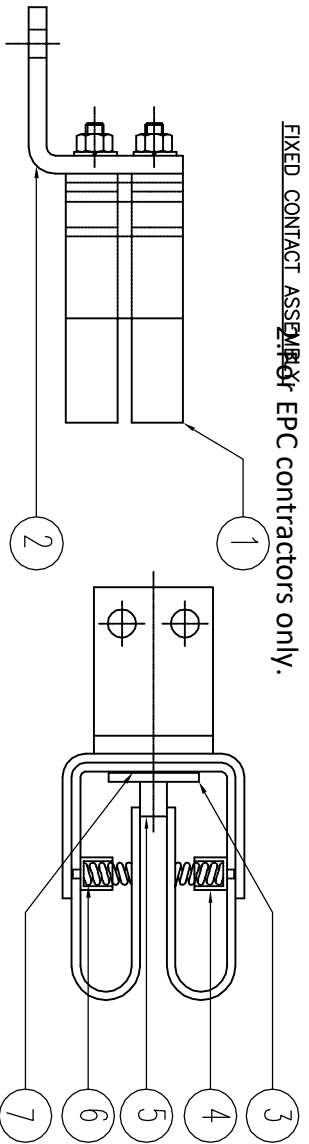

MOVING CONTACT ASSEMBLY:

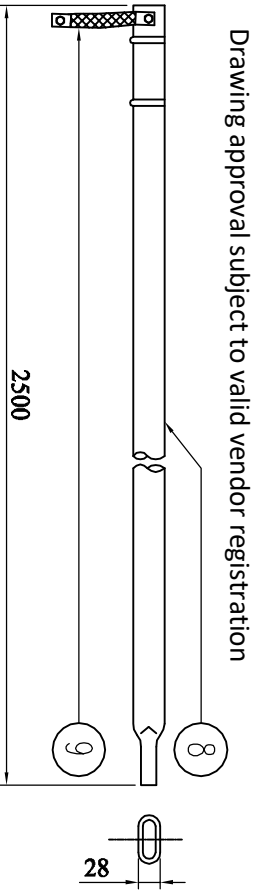

Drawing approval subject to valid vendor registration

Since the supply of terminal connectors is not in the scope of manufacturer as mentioned in the drawings. The EPC contractor shall be instructed to supply the same line with CT/PT/CVT/isolator/VT/LA/Breaker requirement and capability.

Live part to ground clearance shall be maintained during erection as per IE rules.

PART LIST:

1. JAWS (32 x 4 , 2 Nos. HDEC FLAT SILVER PLATED)
2. F.C. SUPPORT PLATE (8 mm THICK M.S. HDG)
3. JUMPER PLATE (75 x 12 AL. FLAT)
4. BUSH (NYLON)
5. SPACER (ALUMINIUM)
6. SPRINGS (φ2mm, STAINLESS STEEL WIRE)
7. MOVING CONTACT ASSEMBLY (38-ODX30-ID HDEC TUBE)
8. COPPER FLEXIBLE (25X4MM, 4NOS TIN PLATED)

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETER
2. ALL FERROUS PARTS ARE HOT DIP GALVANIZED (85 MICRONS)
3. ALL NON FERROUS CONTACT POINTS ARE SILVER PLATED (15 MICRONS)
4. NECESSARY BOLT, NUTS, PLAIN & SPRING WASHERS WILL BE FITTED WITH EQUIPMENT

CHIEF ENGINEER/PROJECTS
APTRANSCO/VS/VIJAYAWADA

(T. SESHAGIRI RAO)
Managing Director

For Pavani Power Systems Pvt. Ltd.



TRANSMISSION CORPORATION OF
ANDHRA PRADESH LTD

REVISIONS		TITLE:	
D	C	BARTH SWITCH CONTACT ASSEMBLY	
B	A	(FOR 245KV, ISOLATOR)	
A			
		SCALE: 1:1	DATE: 18-05-2023
		CHECKED	APPROVED
		SHEET	03 OF 09
		DRG. NO.	PPSP-APT-ESCA-44-03



PAVANI POWER SYSTEMS PVT. LTD.
Plot No. 06/056/4/6, K.K. OVERSEAS SOCIETY,
UDA, DULAPALLY, QUTHUBULLAPUR MANDAL,
KODURU FORT, HYDERABAD - 500100.
KERUVAL MALKAJGIR DIST. TELANGANA

NOTE: 1. Drawings Approval subject to valid type test reports, to be checked during acceptance tests.
2. For EPC contractors only.

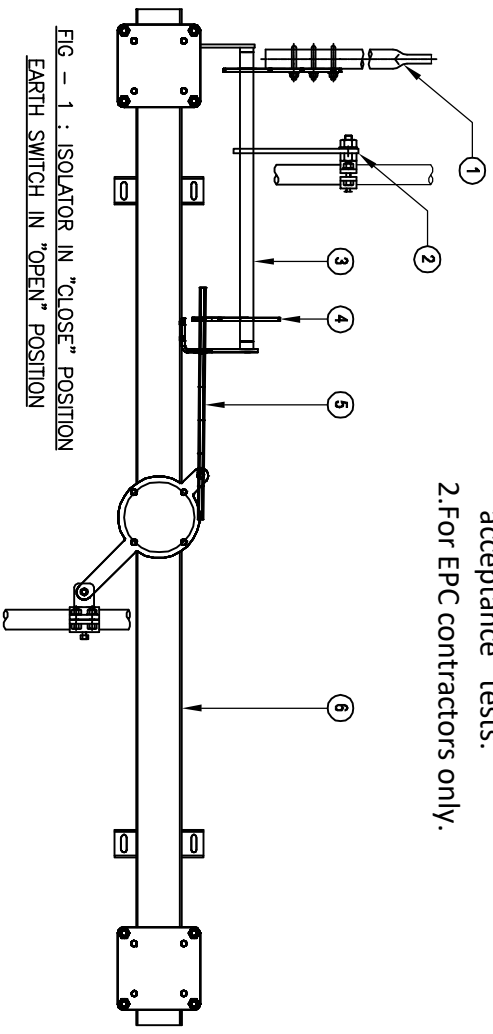


FIG - 1 : ISOLATOR IN "CLOSE" POSITION
EARTH SWITCH IN "OPEN" POSITION

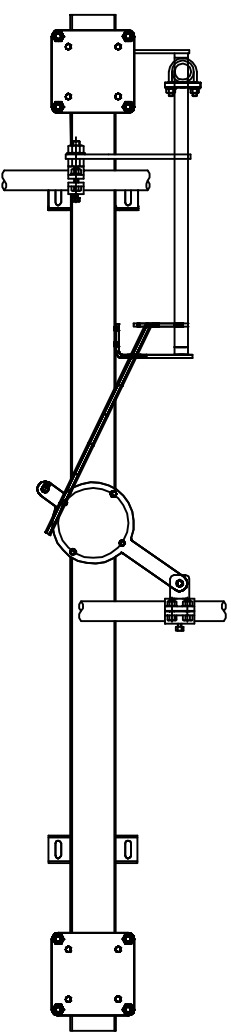


FIG - 2 : ISOLATOR IN "OPEN" POSITION
EARTH SWITCH IN "CLOSE" POSITION

Drawing approval subject to valid vendor registration
CHIEF ENGINEER/PROJECTS
APTRANSCO/VS/VIJAYAWADA

The following notice to be pasted on the Engine in a sticker form
"RAKSHAK OIL SAE 15W40 APICF4 GRADE to be used as lubricating oil lub oil sump capacity 9.5ltrs".

CONSTRUCTION :

E.S MOVING CONTACT (1), E.S OPERATING LEVER (2) & E.S STOPPER PLATE (4) ARE CONNECTED TO THE E.S ROTATING PIPE (3). ALSO MOVES ALONG WITH THE ROTATING PIPE (3) ISOLATOR OPERATING LEVER (6) IS CONNECTED TO THE STOPPER ROD (5) WHICH IS ACT AS A MECHANICAL STOPPER.

FUNCTION :


IN FIG-1: WHEN ISOLATOR IS IN CLOSE CONDITION THEN ISOLATOR OPERATING LEVER (6) CONNECTED TO STOPPER ROD (5) MOVES THROUGH STOPPER PLATE (4) AND LOCKED WHICH WILL NOT PERMIT TO MOVE E.S ROTATING PIPE (3) EARTH SWITCH MOVING CONTACT (1) TO CLOSE POSITION.

IN FIG-2: WHEN EARTH SWITCH IS IN CLOSE CONDITION THEN ISOLATOR OPERATING LEVER (6) CONNECTED TO STOPPER ROD (5) IS LOCKED WITH STOPPER PLATE(4) WHICH WILL NOT PERMIT TO MOVE ISOLATOR OPERATING LEVER (6) TO CLOSE CLOSE POSITION.



NOTES :

1. E.S. MOVING CONTACT (38 OD X 30 ID Cu. PIPE)
2. E.S. OPERATING LEVER (50 X 10mm THIK MS FLATE HDG)
3. E.S ROTATING PIPE (25 NB MS PIPE HDG)
4. STOPPER ROD (ϕ 25mm ROD MS HDG)
5. STOPPER PATE (6mm THIK PLATE MS HDG)
7. BASE CHANNEL (145X80X5mm Thk. RECTANGLE BOX M.S HDG)

For Pavani Power Systems Pvt. Ltd.
(T. SESHAGIRI RAO)
Managing Director

 TRANSMISSION CORPORATION OF ANDHRA PRADESH LTD		SCALE: 1:1
		DATE: 18-05-2023
MECHANICAL INTERLOCK BETWEEN MAIN SWITCH AND EARTH SWITCH		DRAWN
PAYANI POWER SYSTEMS PVT.LTD. Plot No. 06/065/4/6, K.K. OVERSEAS SOCIETY, KODAPALLI POST, HITEERABAD - 500100. MEDICAL MAJKAGER DIST. TELANGANA		CHECKED
REVISIONS D C B A		APPROVED
SHEET: 04 OF 09 DRG. NO: PPSPT-APT-MIL-A4-04		

NOTE: 1. Drawings Approval subject to valid type test reports, to be checked during acceptance tests.
2. For EPC contractors only.

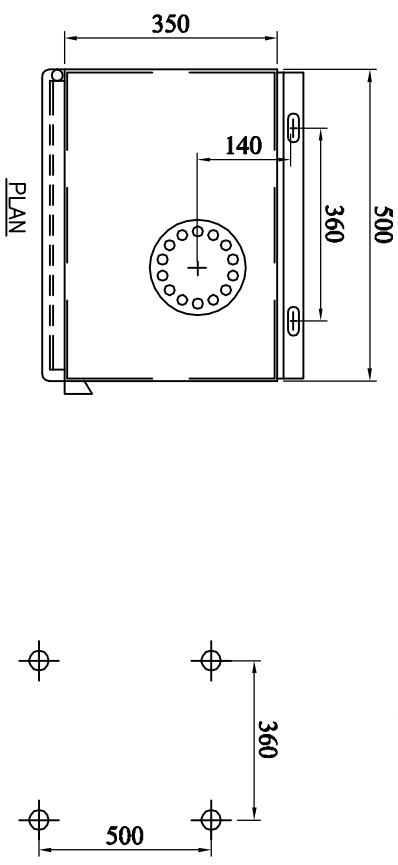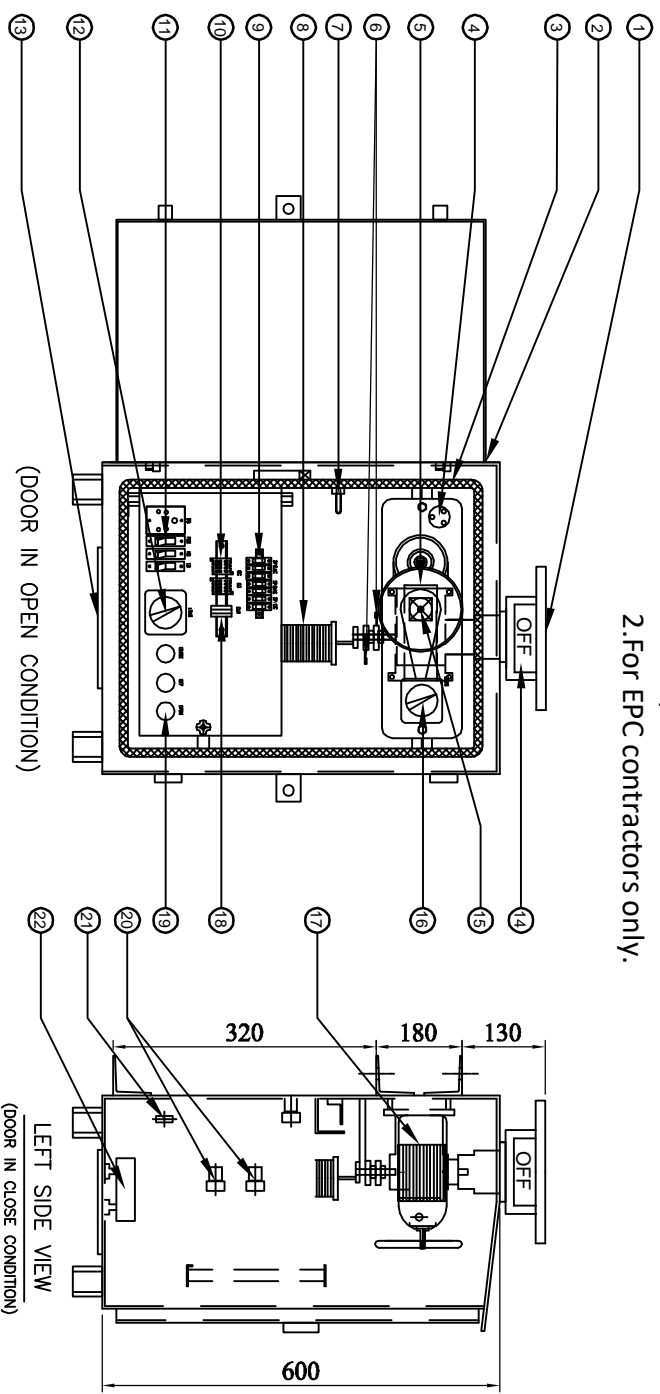

- PART LIST:-**
1. 14-HOLES FLANGE
 2. CUBICAL WITH DOOR (3mm Alu. SHEET)
 3. RUBBER GASKET (EPDM)
 4. THORMOSTAT (30°C TO 85°C)
 5. REDACTION GEAR BOX
 6. LIMIT SWITCHES (OPEN & CLOSE)
 7. CUBICLE LAMP HOLDER
 8. AUXILIARY SWITCH - 12NO+12NC
 9. 3-POLE MCB-FOR MOTOR SUPPLY
2-POLE MCB-FOR SINGLE PHASE SUPPLY
 10. CONNECTORS FOR OPEN & CLOSE
 11. POWER SOCKET/LIGHT & HEATER SWITCHES
 12. LOCAL/REMOTE/MANUAL SELECTOR SWITCH
 13. DETACHABLE TYPE CABLE GLANDS PLATE
 14. ON/OFF INDICATOR
 15. MANUAL OPERATING ARRANGEMENT
 16. INTER LOCK ROTARY SWITCH
 17. MOTOR (0.5HP 415V AC, 50 Hz)
 18. OLR-OVER LODE RELAY
 19. PUSH BUTTONS
 20. TERMINAL BLOCK
 21. EARTHING TERMINAL-2 Nos.
 22. HEATER

7622027/2023/EMRT-ENE51

ALL DIMENSIONS ARE IN MILLIMETERS
CUBICLE WILL BE POWDER COATED WITH LIGHT GRAY SHADE NO:631 OF IS : 5
DEGREE OF PROTECTION IP: 55 AS PER IS : 13947
20% SPARE TERMINALS WILL BE PROVIDED AND SHALL BE UNIFORMLY DISRIBUTED
TO ALL TERMINAL BLOCKS EQUALLY
WIRING WILL BE DONE WITH 1100V.GRADE 2.5 Sq.MM CU STRANDED P.V.C.
INSULATED CONDUCTOR
WEIGHT OF THE BOX : 95Kg (APPROX.)
PPSP PL MAKE REDUCTION GEAR RATIO:20:1 MATERIALS EN8/STEEL

Drawing approval subject to valid vendor registration

CHIEF ENGINEER/PROJECTS
APTRANSCO/VS/VIJAYAWADA

AP TRANSCO

TRANSMISSION CORPORATION OF ANDHRA PRADESH LTD

For Pavani Power Systems Pvt. Ltd.
(T. SESHAGIRI RAO)
Managing Director

REVISIONS

D	C	B	A

TYPE: MOTOR OPERATING MECHANISM BOX
(FOR 245KV ISOLATOR)

SCALE: 1:1

DATE: 18-05-2023

DRAWN: _____

CHECKED: _____


APPROVED: _____

SHEET: 05 OF 09



DRG. NO.: PPSP-APT-MOM-44-05

NOTE: 1. Drawings Approval subject to valid type test reports, to be checked during acceptance tests.

2. For EPC contractor's approval

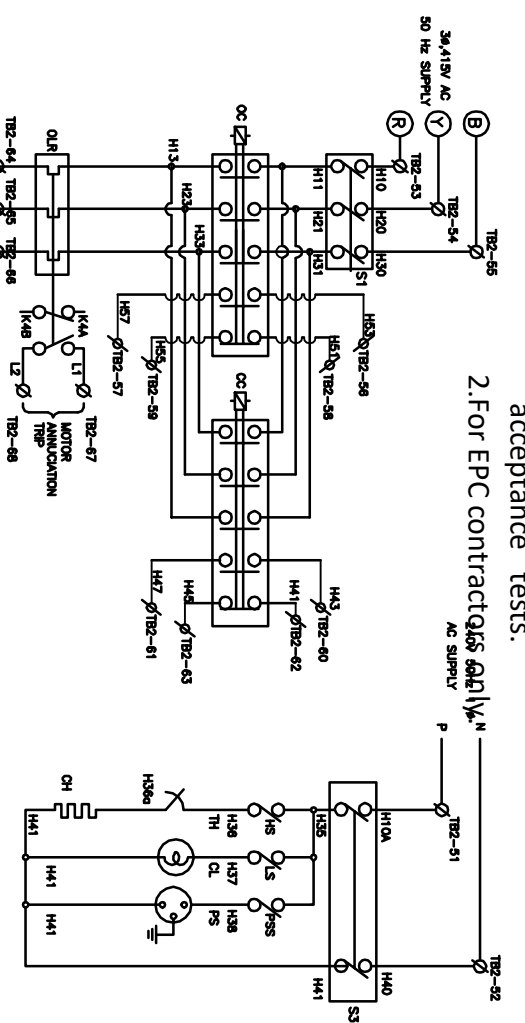

Drawing approval subject to valid vendor registration

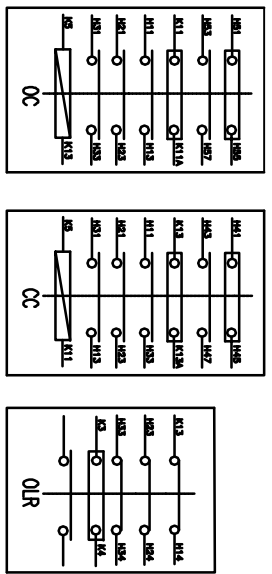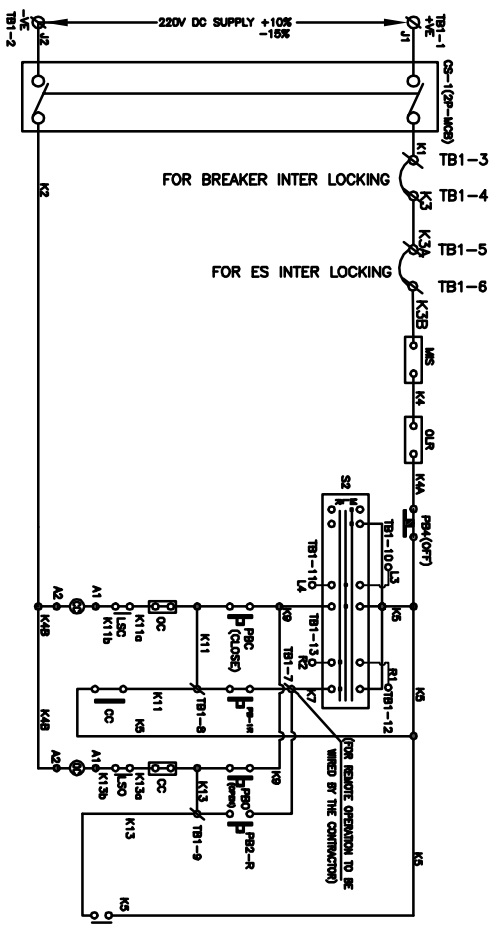

LEGEND	DESCRIPTION	MAKE
CC & OC	Close & Open contactors 220V DC, 7A	C&S/ SIEMENS/ Schneider/ ABB PROVISION FOR LAMP.
CS1&CS2	Compact fluorescent lamp	Grishn Ego./Kontakt Pyrosensors
S3	Cubic heater (80W,240V)	C&S/ SIEMENS/ Schneider/ ABB
HS	AC 3ø 415V MCB-6A for motor	C&S/ SIEMENS/ Schneider/ ABB
MIS	AC 1ø 240V MCB-16A for AC supply	Anchor/MARU
LS	AC 1ø 240V, 6A one way switch for heater	Recom/Kaycee/Jadbadji/MANI
LSC	Manual interlock switch	Anchor/MARU
LSD	Lamp switch 240V, 6A one way switch	JAI BALAJI/MANI
OLR	Opens when the isolator opens, 10A 1NO+1NC	Bhoskary/Mavis/Grishn EGO
PBC & PBO	Thermostat 30° to 85°C	C&S/ SIEMENS/ Schneider/ ABB
	Over load relay with SPP (1.0A TO 1.6A)	Vishnov/Siemens/Schneider/C&S
	Close and open push buttons, 10A	Anchor/CGL OR Equip.
	Power socket 6A, 1ø, 3pin, 230V	Anchor / Maru OR Equip.
	Power socket 6A, 1ø, 3pin, 230V	Anchor / Maru
	AC 1ø 230V one way switch	Recom/Kaycee/Jadbadji/MANI
	Local / Remote / Manual selector switch	REMI/LHP/ELCEN/CGL
	Motor (0.5 HP 3ø 415V AC, 50Hz)	Power Drives/Imax/Mani's
AUX SWITCH	08NO + 08 NC	Vishnov/Siemens/Schneider/C&S
	Push button to OFF the circuit 10 A	Vin Mech/Elmex/Connectwell
	Terminal block.	

OPERATING INSTRUCTIONS:

1. Operation is possible only when the breaker is 'OPEN' ensure this condition is satisfied
2. For manual operation of isolator follow the following steps:
 - i) Keep selector switch (s2) in manual position.
 - ii) Rotate the rotary switch provided on the top panel board, insert the handle for the manual operation.
 - iii) Rotate the handle clockwise / anticlockwise to open / close the isolator respectively
 - iv) When the manual operation is not needed restore the position of rotary switch on top panel

For Pavani Power Systems Pvt. Ltd.

(T. SESHAGIRI RAO)
Managing Director



TRANSMISSION CORPORATION OF
ANDHRA PRADESH LTD

CHIEF ENGINEER/PROJECTS
APTRANSCO/VS/VIJAYAWADA


REVISIONS		SCALE: 1:1	
D	C	B	A
PAVANI POWER SYSTEMS PVT.LTD. Plot No. 06/065/4/6, K.K. OVERSEAS SOCIETY, DDA, DULAPALLY, QUTHUBULLAPUR MANDAL, KODURUVA FORT, HYDERABAD - 500100. MEDICAL MALKAJGIR DIST. TELANGANA			
DATE	18-05-2023	CHECKED	
DRAWN		APPROVED	
SHEET	06 OF 09	DRAWING	
DESIGN	PPSP-APT-SD-A4-06		

TERMINAL BLOCK FOR DC & AC



2. For EPC contractors only.

NOTE: 1. Drawings Approval subject to valid type test reports, to be checked during acceptance tests.

AUX. SWITCH 12NO / 12NC

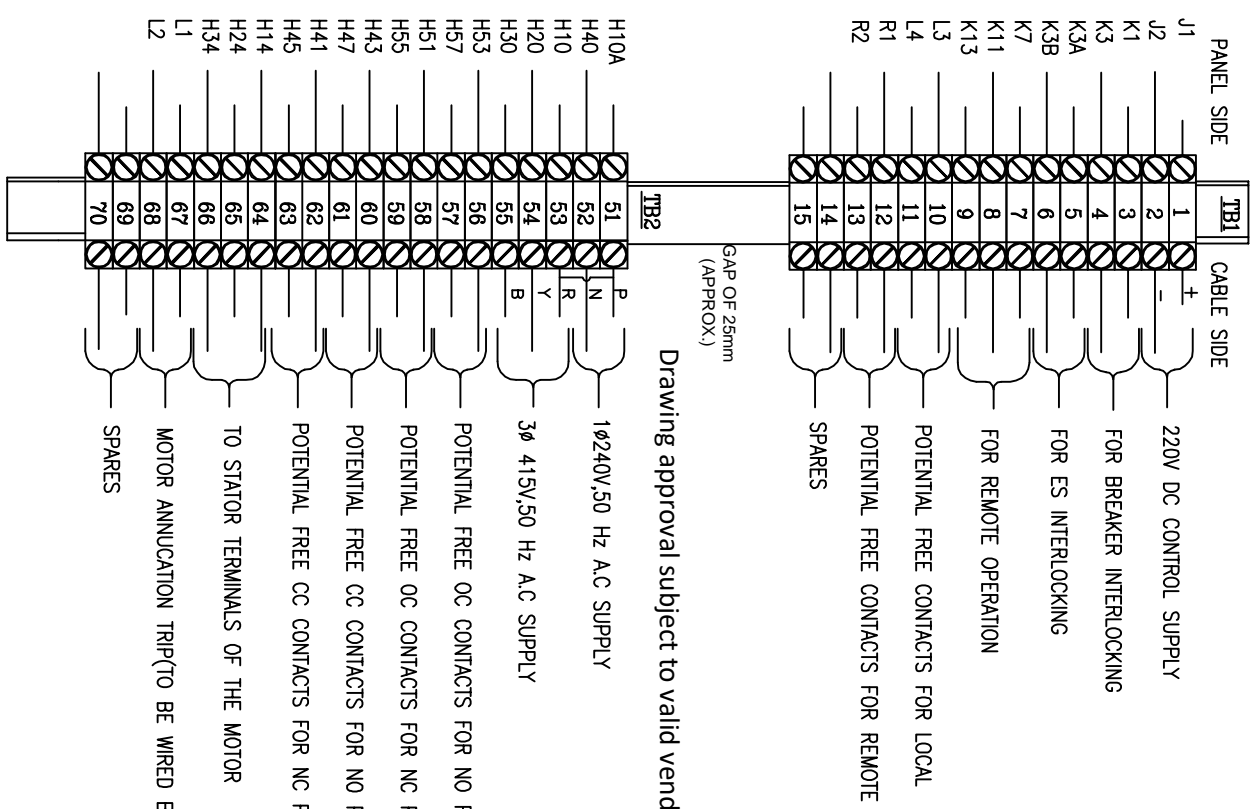


Drawing approval subject to valid vendor registration

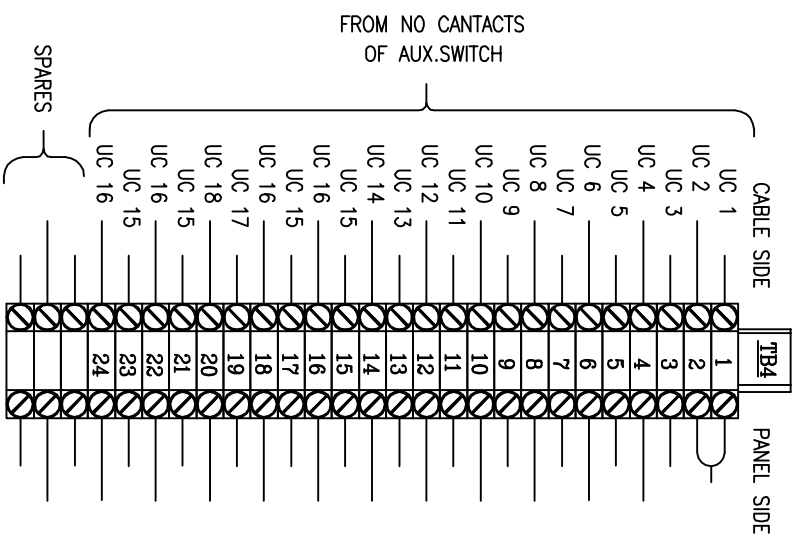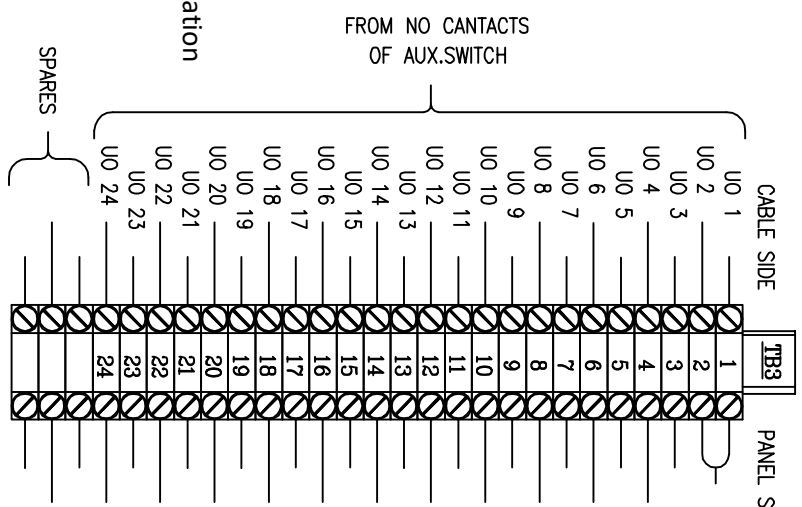

CHIEF ENGINEER/PROJECTS
APTRANSCO/VS/VIJAYAWADA

For Pavani Power Systems Pvt. Ltd.
(T. SESHAGIRI RAO)
Managing Director

Since the supply of terminal connectors is not in the scope of manufacturer as mentioned in the drawings. The EPC contractor shall be instructed to supply the same line with T/PT/CVT/Isolator/IVT/LA/Breaker requirement and compability.



TRANSMISSION CORPORATION OF ANDHRA PRADESH LTD

REVISIONS

D	C	B	A

AP TRANSCO

PAVANI POWER SYSTEMS PVT.LTD.
Plot No. 06/055/4/6, K.K. OVERSEAS SOCIETY,
PDA, DULAPALLY, QUTHUBULLAPUR MANDAL,
KODURU ROAD, HYDERABAD - 500100.
REGISTRAR MALKAJGIR DIST. TELANGANA

TERMINAL BLOCK DETAILS

SCALE: 1:1

DATE: 18-05-2023



DRAWN: _____

CHECKED: _____

APPROVED: _____



SHEET: 07 OF 09

DRG. NO: PPSPT-APT-TBD-44-07






7622027/2023/EFMRT-ENE51

NOTE: 1. Drawings Approval subject to valid type test reports, to be checked during acceptance tests.

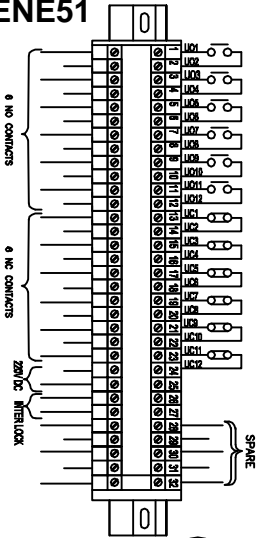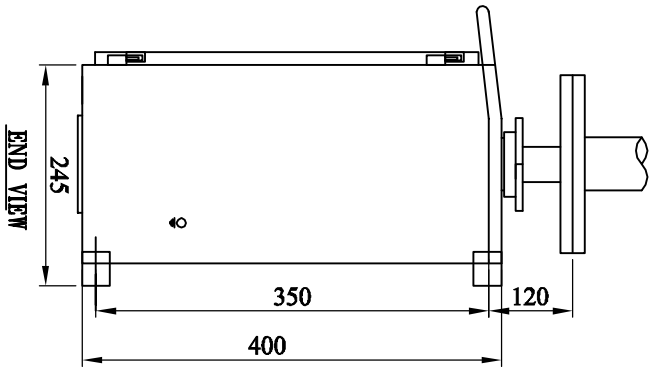


AUX. SWITCH CONTACT DETAILS FOR ISOLATOR (6 NO + 6 NC)

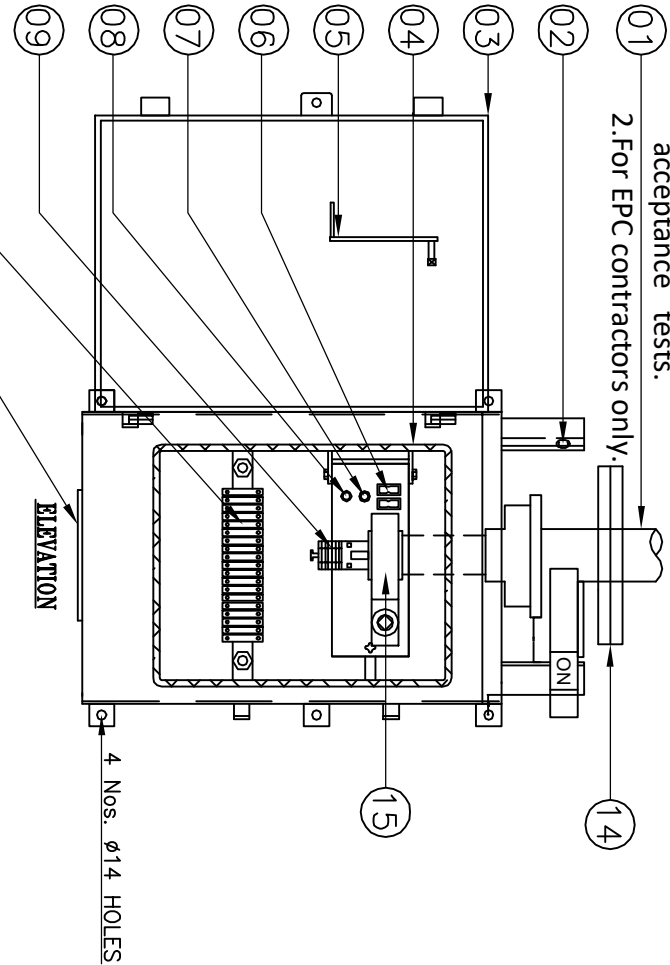

Drawing approval subject to valid vendor registration

PART LIST:-

1. DOWN PIPE
2. ON & OFF STOPPER
3. CUBICAL WITH DOOR 3mm Alu. SHEET)
4. RUBBER GASKET (EPDM)
5. OPERATING HANDLE
6. FUSES (2A)
7. INDICATION LAMP
8. PUSH BUTTON
9. AUXILIARY SWITCH 6NO + 6NC
10. TERMINAL BLOCK(UBT-4 (VINMECH OR EQVT.))
11. DETACHABLE TYPE CABLE GLANDS PLATE
12. EARTHING TERMINAL-2 Nos.
13. RAIN SHADE
14. 12/14 HOLES FLANGE 8MM THK. (M.S HDG)
15. REDUCTION GEAR BOX



LEGEND:
 F1 F2-----FUSES (2amp Rating)
 PB-----PUSH BUTTON
 L-----INDICATION LAMP
 SC-----SOLENOID COIL

For Pavani Power Systems Pvt. Ltd.

(T. SESHAGIRI RAO)
 Managing Director

TRANSMISSION CORPORATION OF
 ANDHRA PRADESH LTD



CHIEF ENGINEER/PROJECTS
 APTRANSCO/VS/VIJAYAWADA REGIONS


ALL DIMENSIONS ARE IN MILLIMETERS
 CUBICLE WILL BE POWDER COATED WITH LIGHT GRAY SHADE NO:631 OF IS : 5
 DEGREE OF PROTECTION IP: 55 AS PER IS :13947
 20% SPARE TERMINALS WILL BE PROVIDED AND SHALL BE UNIFORMLY DISRIBUTED
 TO ALL TERMINAL BLOCKS EQUALLY
 WIRING WILL BE DONE WITH 1100V.GRADE 2.5 Sq.MM CU STRANDED P.V.C.
 INSULATED CONDUCTOR
 WEIGHT OF THE BOX : 35Kg (APPROX.)
 PPSPL MAKE REDUCTION GEAR RATIO:20:1 MATERIALS EN8/STEEL


<p>PAYANI POWER SYSTEMS PVT.LTD. Plot No. 06/065/4/6, K.K. OVERSEAS SOCIETY, KODURU ROAD, HITEERABAD - 500100. MEDICAL MANAGER DIST. TELANGANA</p>	
<p>MANUAL OPERATING MECHANISM BOX (FOR 245kV EARTH SWITCH)</p>	<p>SCALE: 1:1 DATE: 18-05-2023 DRAWN: CHECKED: APPROVED: SHEET: 08 OF 09 DRG. NO: PPSPL-APT-RES-44-08</p>

NOTE: 1. Drawings Approval subject to valid type test reports, to be checked during acceptance tests.

2. For EPC contractors only.

CHIEF ENGINEER/PROJECTS
 APIRANSCO/V/S/VIJAYAWADA


 MANUFACTURED & SUPPLIED BY PAVANI POWER SYSTEMS PVT.LTD. PLOT No.05/055/A/6, K.K.OWMERS SOCIETY, DULAPALLY INDUSTRIAL AREA, KOMMIPALLY POST, HYDERABAD-500100. MEDICAL MALAKAIGIRI DIST. T.S.	
ISOLATOR RATING NAME PLATE	
CLIENT:	TRANSMISSION CORPORATION OF A.P LTD
CUSTOMER:	---
PO.No./DATE:	---
YEAR OF MFG.	---
TYPE	DBR
VOLTAGE (kV)	245
STC kA/SEC.	50/3
CURRENT (A)	1200
SL.No.	---
FREQUENCY (Hz)	50
I.W. VOLTAGE	1050kVp
P.F.W. VOLTAGE(DRY)	460kVrms
OPERATING DRIVE	MOTOR
CONTROL VOLTAGE	220 V DC

 MANUFACTURED & SUPPLIED BY PAVANI POWER SYSTEMS PVT.LTD. PLOT No.05/055/A/6, K.K.OWMERS SOCIETY, DULAPALLY INDUSTRIAL AREA, KOMMIPALLY POST, HYDERABAD-500100. MEDICAL MALAKAIGIRI DIST. T.S.	
ISOLATOR RATING NAME PLATE	
CLIENT:	TRANSMISSION CORPORATION OF A.P LTD
CUSTOMER:	---
PO.No./DATE:	---
YEAR OF MFG.	---
TYPE	VERTICAL
VOLTAGE (kV)	245
STC kA/SEC.	50/1
CURRENT (A)	---
SL.No.	---
FREQUENCY (Hz)	50
I.W. VOLTAGE	1050kVp
P.F.W. VOLTAGE(DRY)	460kVrms
OPERATING DRIVE	MANUAL
CONTROL VOLTAGE	220 V DC

Since the supply of terminal connectors is not in the scope of manufacturer as mentioned in the drawings. The EPC contractor shall be instructed to supply the same line with CT/PT/CVT/Isolator/IVT /LA /Breaker requirement and compability.

For Pavani Power Systems Pvt. Ltd.
 (T. SESHAGIRI RAO)
 Managing Director

Drawing approval subject to valid vendor registration

 TRANSMISSION CORPORATION OF ANDHRA PRADESH LTD	
NAME PLATE DETAILS (FOR 245kV, ISOLATOR AND E.S)	
REVISIONS	DATE
D C B A	18-05-2023
PAVANI POWER SYSTEMS PVT.LTD. Plot No. 05/055/A/6, K.K.OWMERS SOCIETY, DULAPALLY INDUSTRIAL AREA, KOMMIPALLY POST, HYDERABAD - 500100.	
CHECKED	SCALE: 1:1
APPROVED	DATE
SHEET	18-05-2023
DRG.No:	09 OF 09
	PPSP-APT-NPD-44-09